



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

K600/4

FEATURES

- ADJUSTABLE FLANGES
- INSTANTANEOUS READING
- EXTREMELY ACCURATE
- SUITABLE FOR INDUSTRIAL APPLICATIONS
- IDEAL FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTION

PERFORMANCE

UP TO
15-150 L/MIN

FLOW RATE

20 BAR

OPERATING PRESSURE



± 0,5 %

ACCURACY

0,2%

REPEATABILITY

The PIUSI K600/4 is an oval gear meter suitable for monitoring the delivery of low and medium viscosity oils. Its 4 couples of gears allows to reach high flow rates.

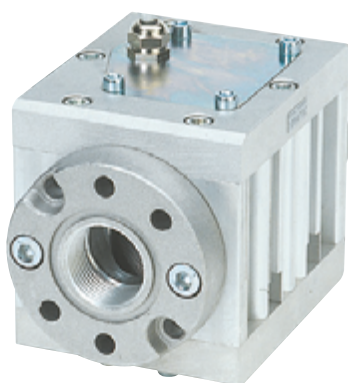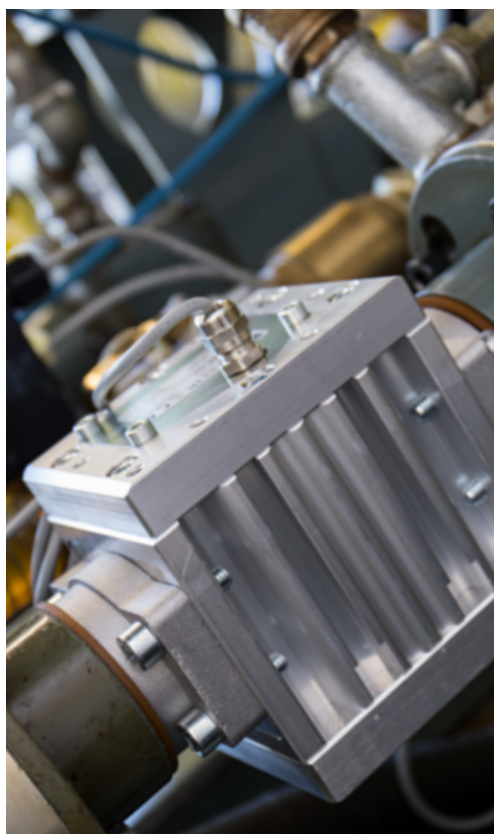**K600/4****K600/4 PULSER**

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX

METER

00049700A	3,2	7	200X120X140	7,9X4,7X5,5		1
-----------	-----	---	-------------	-------------	--	---



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

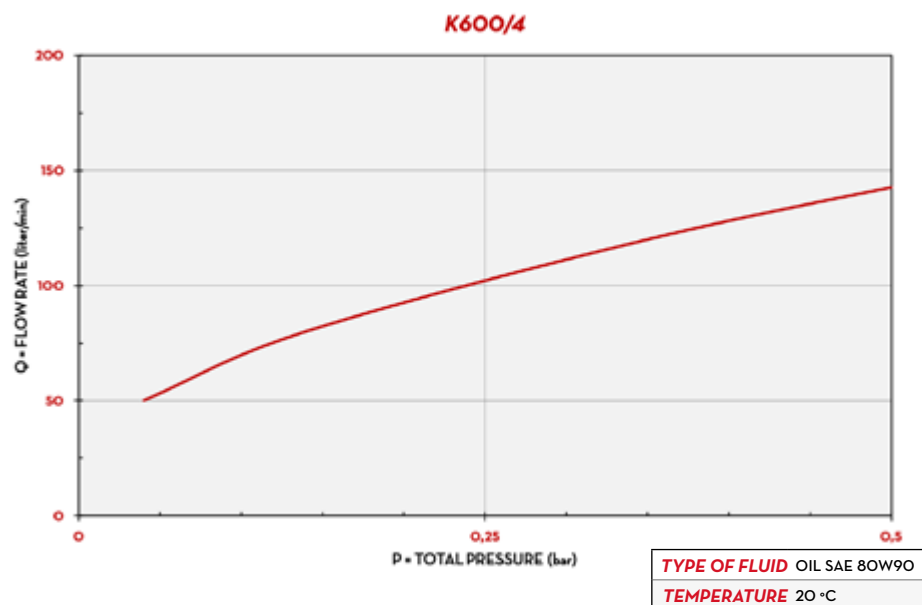

DIMENSIONS

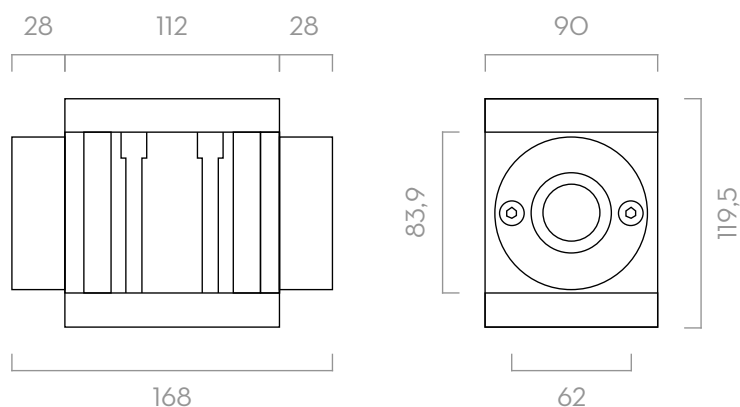

Dimensions expressed in millimeters

IN THE BOX

- K600/4 METER
- INSTRUCTION MANUAL

DETAILS



RESET / CALIBRATE BUTTON



OVAL GEAR



ALLUMINIUM BODY

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		BATTERY INCLUDED NO. 2 2X1,5V	FLANGE	INLET OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI				

METER

00049700A	K600/4 METER 1" BSP		15 - 150	3,9 - 39	20	284	YES	YES	1 1/2" BSP	YES
-----------	---------------------	--	----------	----------	----	-----	-----	-----	------------	-----

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

ELECTRONIC METERS