



CAR FILLING

FUEL MANAGEMENT
SYSTEMS

KITS



PUMPS



METERS



METERED NOZZLES

MK325 METER

FEATURES

- MID EVALUATION CERTIFICATE
- LOW MAINTENANCE COSTS
- BIDIRECTIONAL MEASUREMENT
- ATEX CERTIFICATION

The PIUSI MK325 is a state-of-the-art flow meter, specifically designed to ensure accurate MID measurement of AdBlue®. It is compatible with both fixed and mobile dispensing systems.

PERFORMANCE

UP TO
5-35 L/MIN

FLOW RATE

20 BAR



MAX
OPERATING PRESSURE

±0,3%

ACCURACY

0,2%

REPEATABILITY

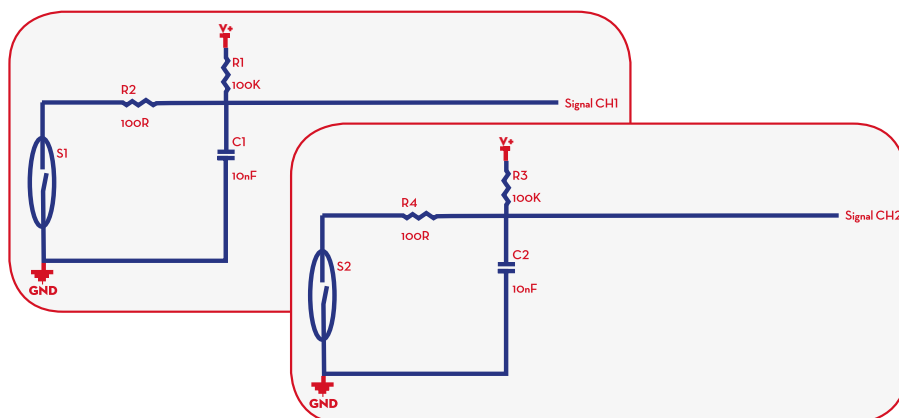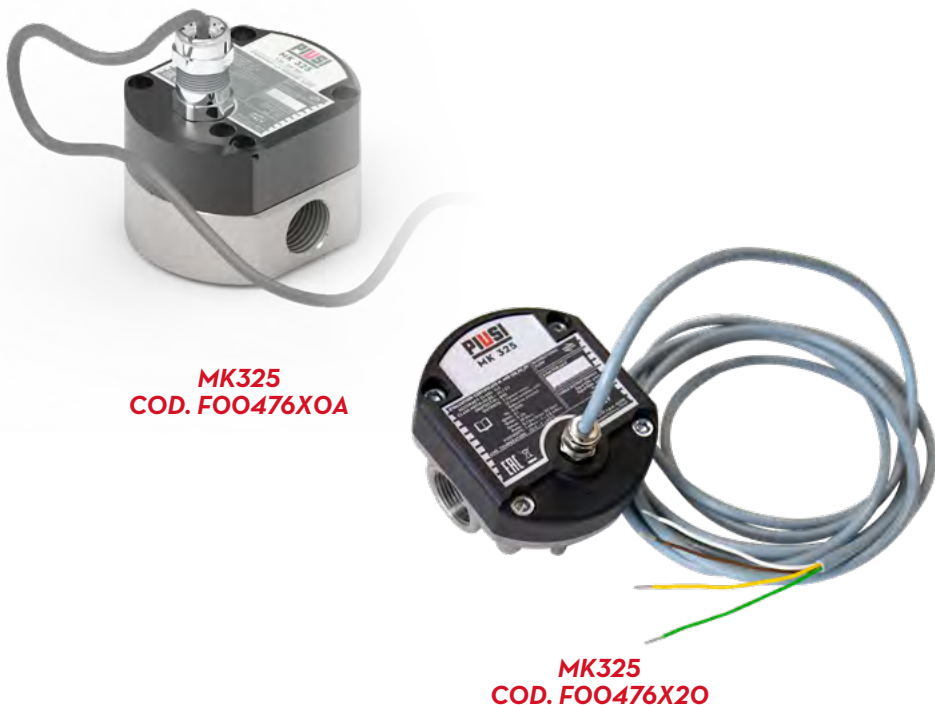

ELECTRICAL SCHEME

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO476X20	1,3	2,64	190X140X160	7,48X5,51X6,3	1
FOO476XOA	2,2	4,85	190X140X160	7,48X5,51X6,3	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER





WINDSCREEN

CHART

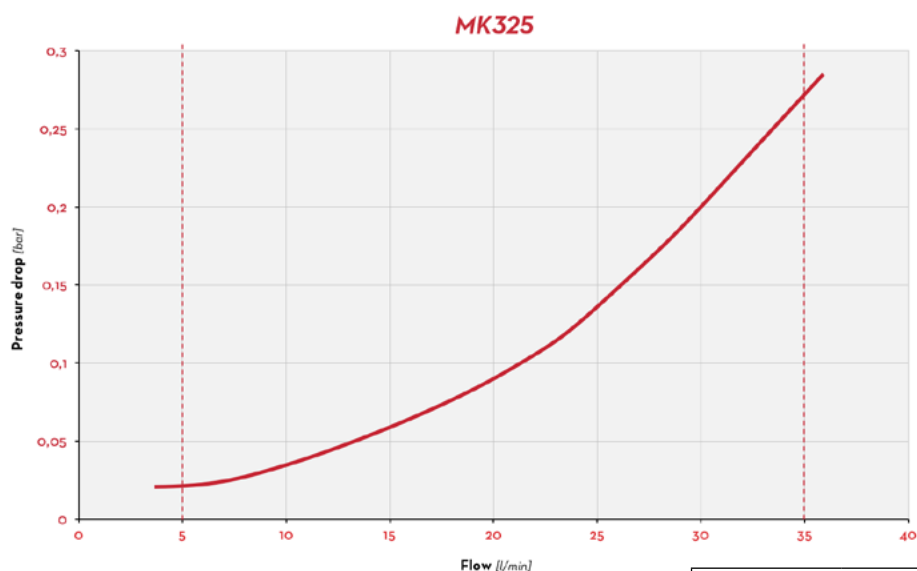

DIMENSIONS

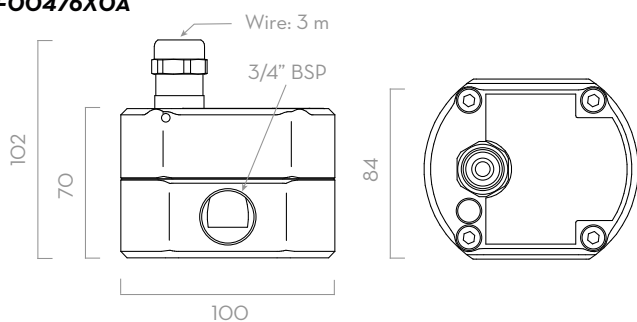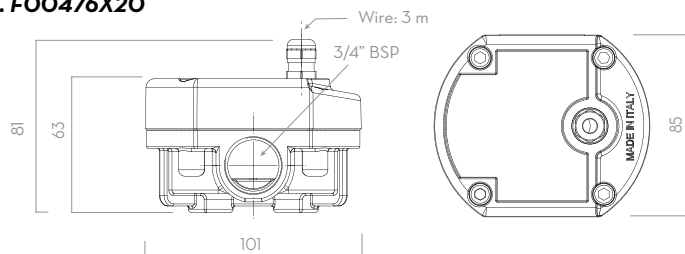MK325
COD. F00476X0A

MK325
COD. F00476X20


Dimensions expressed in millimeters

IN THE BOX

- MK325 METER
- INSTRUCTIONS WITH CALIBRATION FACTOR
- INSTRUCTION MANUAL

DETAILS



3M CABLE LENGTH



ATEX CERTIFIED



PEEK GEAR



BIDIRECTIONAL MEASURING

MATERIALS

- BODY: STAINLESS STEEL
- CABLE BOX: ALLUMINIUM
- GEAR: PEEK
- SEALS: NPR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		ATEX CERTIFICATION	DEGREE OF PROTECTION	PULSE OUT (P/L)	
			L/MIN	GPM	BAR	PSI			PULSE VERSION	DISPLAY VERSION
F00476X20	(EX) MK325 5-35 Z2 3/4" BSP (MID)		5 - 35	1,3 - 8,9,3	20	290	EX-M Z2	IP67	APPROX. 160	NO
F00476X0A	(EX) MK325 5-35 Z1/Z2 3/4" BSP (MID)		5 - 35	1,3 - 8,9,3	20	290	EX-D Z1/Z2	IP65	APPROX. 160	NO