

CAR FILLING







PUMPS



METERS



METERED NOZZLES

SB325_X/SB325_X CAR

FEATURES

- · HEAVY DUTY
- VERSATILE
- BREAK-AWAY SYSTEM
- ERGONOMIC DESIGN
- SPECIFIC SPOUT FOR CARS/ LIGHT COMMERCIAL VEHICLES
- EASY AND PRACTICAL

Specifically developed for AdBlue® refilling on cars/light commercial vehicle and heavy vehicles, SB325_X and SB325_X CAR are patented automatic nozzles by PIUSI equipped with break-away system and stainless steel spout. Designed in compliance with International Standards ISO/ FDIS 22241-4:2009, these two innovative automatic nozzles also feature a reliable, ergonomic and flexible shell that protects the nozzles against weathering and UV radiation.

The SB325_X CAR has a different shape compared to SB325_X and is 2,4 cm shorter, this to allow a better usability and performance in the car/commercial vehicle sector. SB325_X CAR is compatible with all PIUSI AdBlue® pumps. Use with pumps other than the PIUSI range must be subject to prior verification of the system's flow rate.

PERFORMANCE

SB325_X

45 L/MIN

FLOW RATE

3,5 BAR
MAX
OPERATING PRESSURE

SB325_X CAR

27 L/MIN

FLOW RATE

3 BAR
MAX
OPERATING PRESSURE





PACKAGING													
CODE	WEIGHT		PACKAGING										
	KG	LBS	ММ	INCH	PCS/BOX								
F0061700A	0,7	1,5	447X178X85	17,6X7X2,5	1								
F00617210	1.1	2.4	450X180X70	17.7X7X2.7	1								







TANK MONITORING







MERCHANDISE

INDEX




























CHART

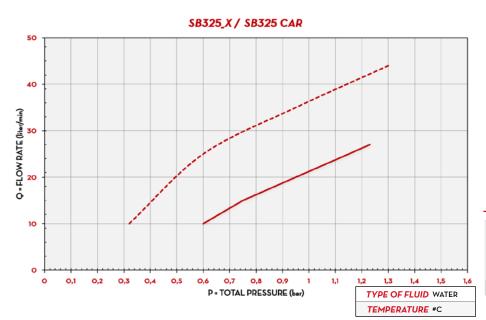

IN THE BOX

- SB325_X/SB325_CAR NOZZLE
- INSTRUCTION MANUAL


DETAILS






DIMENSIONS

396 SB325_X





MATERIALS

- · SPOUT: STAINLESS STEEL
- BODY: TECHNOPOLYMER

Dimensions expressed in millimeters

TECHNICAL DATA													
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		MAGNETIC	METER	PRESSURE	NU	6)4I)4E1	SPOUT			
	DESCRIPTION		L/MIN	GPM	ADAPTOR	METER	BAR	INLET	SWIVEL	EXT. Ø			
F0061700A	AUTOMATIC NOZZLE SB325_X	(M) (MA)	45	12	NO	NO	3,5	3/4"	YES	19 MM			
F00617210	AUTOMATIC NOZZLE SB325_X CAR	(Ad) (W)	27	7	NO	NO	3	3/4"	YES	19 MM			